

GIANT

Team TOBROCO

Industrielaan 2, 5061 KC Oisterwijk

Tel.: +31 (0)13-5211212

Fax: +31 (0)13-5234045

Internet: www.tobroco-giant.com

E-Mail: info@tobroco.com



D204SW

D254SW

D204SW TELE

D254SW TELE

WHEEL LOADERS

Big performance in a small package



D204SW - D254SW - D204SW TELE - D254SW TELE

WIDE SELECTION

TOBROCO-GIANT offer a wide selection of unique wheel loaders. Flexible, strong and adjusted to your requirements for small-scale and large-scale operations.



	D204SW	D254SW	D204SW TELE	D254SW TELE
Engine	3 cylinder Kubota D722	3 cylinder Kubota D902	3 cylinder Kubota D722	3 cylinder Kubota D902
Power	20 hp / 15 kW	25 hp / 18 kW	20 hp / 15 kW	25 hp / 18 kW
Drive system	Hydraulic 4WD with automotive pump, Poclain wheel motors	Hydraulic 4WD with automotive steering, Poclain wheel motors	Hydraulic 4WD with automotive pump, Poclain wheel motors	Hydraulic 4WD with automotive steering, Poclain wheel motors
Driving speed	0 - 15 km/h	0 - 15 km/h	0 - 15 km/h	0 - 15 km/h
Working hydraulics	28 L/min, 150 bar	28 L/min, 150 bar	28 L/min, 190 bar	28 L/min, 190 bar
Parking brake	Hydraulic multi-disc brake, electrically activated	Hydraulic multi-disc brake, electrically activated	Hydraulic multi-disc brake, electrically activated	Hydraulic multi-disc brake, electrically activated
Tipping load, vehicle straight	1.000 kg	1.000 kg	--	--
Lifting capacity	1.100 kg	1.100 kg	--	--
Weight	1.100 kg	1.100 kg	1.200 kg	1.200 kg
Diesel / Oil capacity	45 L / 52 L	45 L / 52 L	46 L / 48 L	46 L / 48 L
Quick change	GIANT Compact (Mechanical)	GIANT Compact (Mechanical)	GIANT Compact (Mechanical)	GIANT Compact (Mechanical)
Standard tyres (vehicle width)	23x8.50-12 AS (960 mm)	23x8.50-12 AS (960 mm)	23x8.50-12 AS (960 mm)	23x8.50-12 AS (960 mm)

Details subject to change.

MULTIFUNCTIONAL

GIANT supplies hundreds of attachments, which allows you to use the wheel loader for many more work operations than you might at first have imagined possible.



RAPID REPLACEMENT

Thanks to the GIANT rapid-replacement system, you can uncouple and couple your attachments easily and quickly. Note: To be of even greater service to you as our customer, we not only offer a range of uncoupling and coupling systems, but also custom attachments. Do you not have a GIANT rapid replacement system or are you looking for an attachment geared towards your particular situation? Ask your nearest GIANT dealer about optional features.

D204SW UNTIL D254SW TELE



GIANT COMPACT
MECHANICAL

OPTION: HYDRAULIC



WWW.GIANT-ATTACHMENTS.COM

Note: TOBROCO-GIANT advises against the use of a shovel that exceeds the width of the machine incl. tyres.

GOOD THINGS COME IN SMALL PACKAGES

All the advantages at a glance:

- ✓ IDEAL FOR SMALL SPACES
- ✓ EASY TO TRANSPORT
- ✓ COMPACT
- ✓ AFFORDABLE QUALITY
- ✓ GIANT COMPACT QUICK CHANGE
- ✓ WIDE RANGE OF ATTACHMENTS
- ✓ MANY OPTIONS AVAILABLE
- ✓ HIGH LIFT HEIGHT

CUSTOMER-ORIENTED

We know the importance of listening to customers. Together we seek a suitable solution for your situation. We enjoy a challenge.

HYDRAULICS




Double acting hydraulic function on the lift arm (mechanically operated)

SAFETY



Standard with ROPS / FOPS safety roof, incl. safety doors left and right.

STRONG



The GIANT COMPACT TELE series comes with powerful, fuel-efficient Kubota engines and four powerful Poclain wheel motors.

Many options available!
WWW.TOBROCO-GIANT.COM



TYRES

A wide selection of tyres makes the machine suitable for any surface.



23x8.5-12 AS
(57,5 x 20,5 cm)
Standard on machine



23x8.5-12 Skid
(58,5 x 21,5 cm)



23x8.5-12 Grass
(57,5 x 21 cm)



23x10.5-12 AS
(58 x 25,5 cm)



23x10.5-12 Grass
(58,5 x 26 cm)




24x13-12 Grass
(60,5 x 32 cm)

Details subject to change.

TECHNICAL SPECIFICATIONS


	D204SW	D254SW	D204SW TELE	D254SW TELE
A	1.230	1.230	1.247	1.247
B	2.211	2.211	2.265	2.265
C	2.911	2.911	2.870	2.870
G	1.020	1.020	1.020	1.020
H	2.060	2.060	2.060	2.060
J	1.380	1.380	1.310	1.310
K	1.408	1.408	2.120	2.120
L	2.170	2.170	2.800	2.800
M	2.976	2.976	3.360	3.360
N	43°	43°	43°	43°
O	45°	45°	50°	50°
P	46°	46°	40°	40°
Q	34°	34°	34°	34°
R	Ø 570	Ø 570	Ø 570	Ø 570
1A	2.225	2.225	2.225	2.225
1B	1.967	1.967	1.967	1.967
1C	978	978	978	978
1D	920	920	920	920

Dimensions in mm, measured on standard tyres.

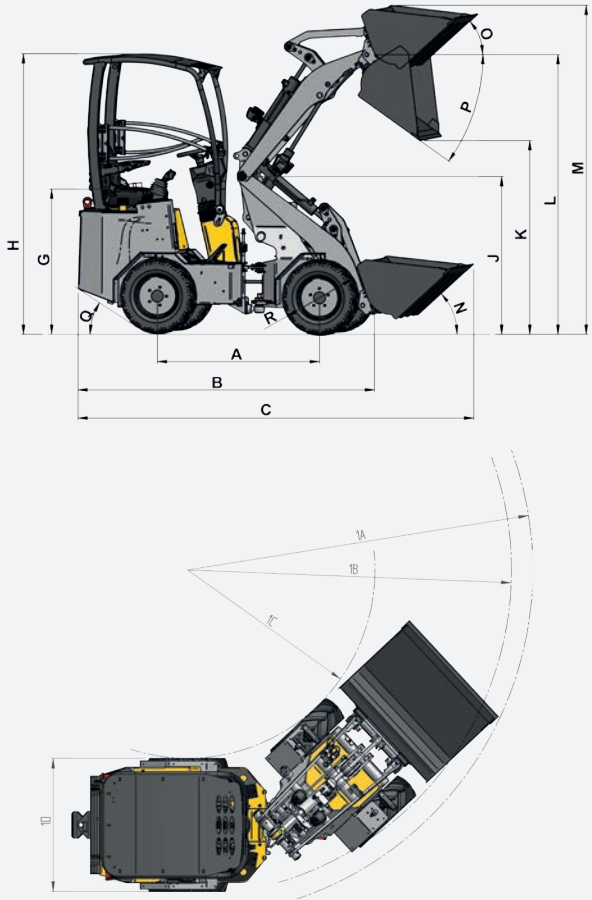


	D204SW	D254SW	D204SW TELE	D254SW TELE
S	1.000 kg	1.000 kg	See lifting table	
T	800 kg	800 kg		
U	550 kg	550 kg		
V	410 kg	410 kg		
W	1.480 kg	1.480 kg		
X	840 kg	840 kg		
Y	510 kg	510 kg		

Tipping loads measured in straight-ahead position, with no extra counterweights.
We reserve the right to make changes without notice and are not responsible for errors or omissions.

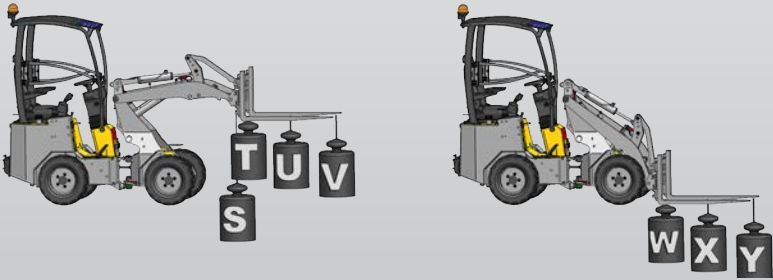

TIPPING LOAD TABLE

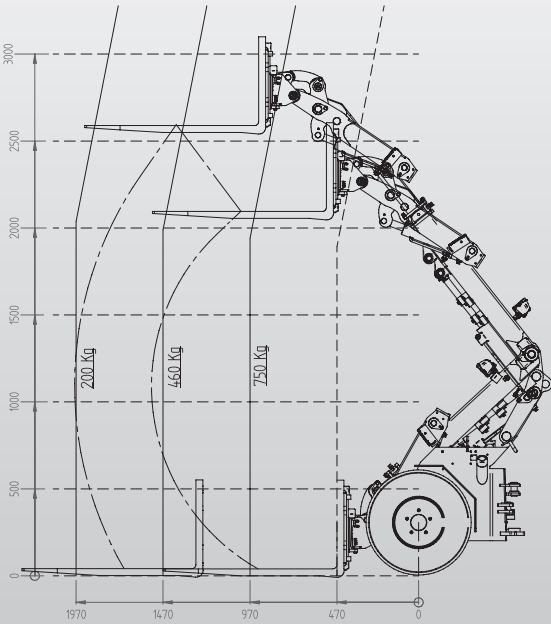

Details subject to change.